



mini-edge-1s

All-In-One Portable Case for mini-edge

This Dedicated Portable Case made of high-strength PP material is equipped with a 13.3-inch IPS display and a switcher. Integrated audio and video switching, PTZ camera control, multi-view monitoring, and recording in one case, this portable and shock-resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.



Education



Sports



Worship



Events




Conference

Key Features

- Professional aviation connector to ensure high-quality performance
- Flexible standard connectors to meet personalized application
- Built-in 13.3" HD IPS monitor
- High strength PP flightcase features long-lasting durability
- hydraulic rod support to enhance the stability
- Powerful air-cooling system designed for outdoor use
- Built-in 5.5 inch LCD screen for mini-edge
- Quad HDMI 2.0 inputs (HDCP compliance), resolutions up to 4K@60
- One USB (UVC) input supports camera source from RGBlink vue PTZ and webCAM
- Eight audio inputs with Four HDMI 2.0 embedded audio inputs and Four external audio inputs (one MIC, one LINE, one Bluetooth and one Type-C digital audio)
- Eight audio inputs allow for output of mixed audio across one or all available channels
- Dual HDMI 1.3 outputs for monitoring of multi-window PVW, PGM or AUX
- Dual audio out jacks for listening
- One-key recording. Recording capacity of hard drive is up to 2TB
- Support simultaneous streaming to 4 live streaming platforms via RTMP(S)
- Support multi-layer overlay, layer scaling and cropping
- 17 switching effect modes
- 5-direction joystick for controlling up to 4 PTZ cameras
- Support saving up to 10 scene presets and thumbnails for real-time full preview
- Web control and monitoring, compatible with mobile devices and computers, compatible with multiple operating systems
- Support Chroma Key
- 5G/4G Smartphone Tethering for iOS and Android system
- Air cooling design to ensure 24/7 stable operation

Application

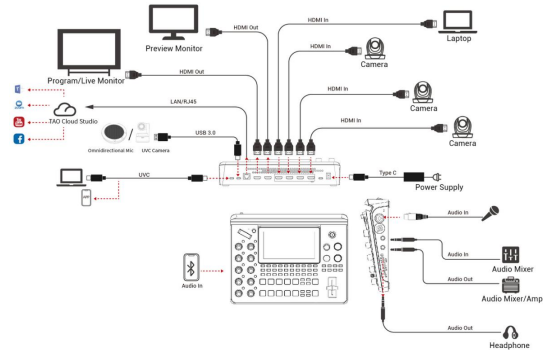

Specification

| | | | |
|----------------------|---------------------------|--|--|
| Connectors | Input | HDMI 4K SDI UVC (webcam) | 3×HDMI-A 1×BNC 1×USB-C |
| | Output | HDMI 2K SDI UVC USB (record) LAN (stream) | 1×HDMI-A 1×BNC 1×USB-C 1×USB-C 1×RJ45 |
| | Audio In | MIC LINE Bluetooth UAC HDMI SDI | 1×CANNON Jack (XLR) 1×6.35mm TRS Jack 1×Bluetooth Module 1×USB-C 3×HDMI-A 1×BNC |
| | Audio Out | AUDIO HDMI SDI UVC LAN USB (record) | 1×6.35mm TRS Jack 1×3.5mm mini-Jack 1×HDMI-A 1×BNC 1×USB-C 1×RJ45 1×USB-C |
| Performance | Input Resolution | HDMI SDI | 1280×720@50/59.94/60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1366×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1200@60 1920×1080i@50/59.94/60 1920×1080p@23.98/24/25/29.97/30/50/59.94/60 3840×2160p@30/50/60 4096×2160@30/50/60 1080P@23.98/24/25/29.97/30/50/59.94/60 |
| | Output Resolution | HDMI SDI USB (Webcam) | 1280×720@50/60 1920×1080@60 3840×1080@30 1080P@23.98/24/25/29.97/30/50/59.94/60 1920×1080@24/25/30/50/60 |
| | Video | Video Formats Grayscale Processing Video Sampling Video Latency | HDMI 2.0 HDCP 2.2 10bit 4:4:4 YUV <4 frames |
| | Audio | Line In Delay Audio Format | up to 8 frames HDMI USB Linear PCM, 24 bits/48 kHz, 2 ch Linear PCM, 16 bits/48 kHz, 2 ch |
| | Record/Storage | Record Formats Disk Formats | MP4 FAT32(≤32 GB) exFAT(64GB~2T) |
| | Supported Standards | HDMI USB H.265 | 2.0 3.0 ITU-T H.265/ ISO/IEC 23008-2 |
| | | ITU-T H.265/ ISO/IEC 23008-2 | |
| 13.3" Display | Screen Size | 13.3" | |
| | Panel Type | IPS | |
| | Display Color | 16.7M, 72%NTSC/16.7M, 100% sRGB | |
| | Resolution | 1920×1080 pixels | |
| | Aspect Ratio | 1000:1 | |
| | Gamut | 72% | |
| | Brightness | 350 cd/m ² | |
| Refresh Rate | 60Hz | | |
| View Angle | 85°/85°(L/R) 85°/85°(U/D) | | |
| Power | Input Voltage | PD 12V/5A | |
| | Maximum Power | 60W | |
| Physical | Outer Size | 460mm × 360 mm × 200mm | |
| | Material | PP | |
| | Color | Black | |
| | Packaged Weight | 9.23 kg | |
| Packaged Dimension | 470mm × 370mm × 210mm | | |

Order Codes

| Order Codes | Item |
|---------------|---|
| 230-0006-04-0 | mini-edge-1s (1 × mini-edge + 1 × Flightcase Suite + 1 × 13.3" Display) |

Contact us

Tel: +86-592-5771197
 Fax: +86-592-5788216
 E-mail: sales@rgbink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,
 Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

