

MSP 311

HDMI 2.0 Audio Extractor with HDCP 2.2



with bracket


Key Features

- HDMI 2.0b (18Gbps), HDCP 2.2 compliant
- Video resolutions up to 4K2K@50/60Hz (YUV444)
- Extracts HDMI audio to multi-channel optical (SPDIF) or L/R analog audio
- Supports HDMI High Bit Rate (HBR) audio pass through
- Audio sample rates up to 192kHz
- 10bits HDR (High Dynamic Range) Pass through
- Supports CEC bypass
- Supports rack mount installation


Specification

Connectors	Input	HDMI	1×HDMI-A	
	Output	HDMI	1×HDMI-A	
		Optical [S/PDIF]	1×SC	
		L/R	1×3.5mm Stereo Mini-jack	
Performance	Supported Input Resolutions	SMPTE	720p@60 1080p@60 2160p@30/50/60	
		VESA	1280×720@60 1360×768@60 1366×768@60 1600×900@60 1920×1080@60 2540×1440@60 3480×2048@60 3840×2160@30/50/60	
	Supported Output Resolutions	SMPTE	720p@60 1080p@60 2160p@30/50/60 1280×720@60 1360×768@60 1366×768@60 1600×900@60 1920×1080@60 2540×1440@60 3480×2048@60 3840×2160@30/50/60	
		Audio	HDMI	PCM2, 5.1/ 7.1CH Dolby Digital DTS 5.1 Dolby Digital+ Dolby TrueHD DTS-HD Master Audio Dolby Atmos DTS:X
		Optical	LPCM2CH Dolby Digital 2/5.1CH DTS2/5.1CH	
		LR	Analog stereo 2CH	
	Supported Standard	HDMI 2.0b		
Power	Input Voltage	DC 12V/1.5A		
Environment	Working Temperature	-0°C~40°C		
	Storage Temperature	-20°C~60°C		
	Humidity	20%~90%		
Physical	Weight	Nett	0.13kg	
		Packaged	0.43kg	
	Dimensions	Nett	93mm×61mm×24mm	
		Packaged	160mm×120mm×80mm	

Application

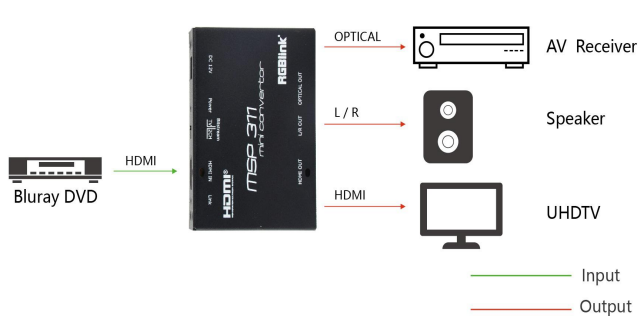


Dimension

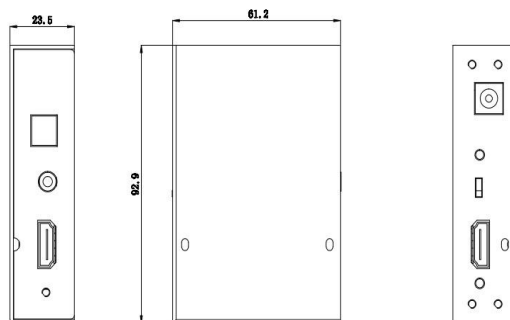

Order Codes

Product Code	Item
621-0311-01-0	MSP 311
920-0005-01-0	MSP Garage with PSU



Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink®

www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.