

PTZ AI Tracking Camera



Key Features

- Full-scene solution for different scenario demands
- Stable tracking
- Super wide dynamic exposure
- H.264/H.265 Dual Stream Output Adapted to Different Network Environments
- Super quiet holder
- Low-power consumption sleep/wake up mode


Specification

Connectors	Video(Output)	RGB12X-HAI-WH/RGB20X-HAI-WH		RGB12X-SAI-WH/RGB20X-SAI-WH	
			HDMI	2×HDMI-A	SDI
		USB3.0	2×USB	LAN	2×RJ45
		LAN	2×RJ45		
	Audio	Input	1×3.5mm Stereo Jack		
	Communication	RS232	1×DIN 8		
	Power		1×HEC3800 DC Socket		
Performance	Camera		12X Optical Zoom	20X Optical Zoom	
		Optical Zoom	12X f=3.9~46.8mm	20X f=5.5~110mm	
		View Angle	6.3°~72.5°	3.3°~54.7°	
		AV	F1.8 ~ F2.4	F1.6 ~ F3.5	
		Digital Zoom	10X		
		Minimum Illumination	0.5 lux (F1.8, AGC ON)		
		DNR	2D & 3D DNR		
		White Balance	Auto/Manual/One Push/3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K		
		Focus	Auto/Manual		
		Aperture/Electronic Shutter	Auto/Manual		
		BLC	ON/OFF		
		WDR	OFF/Dynamic Level Adjustment		
		Video Adjustment	Brightness/Color/Saturation/Contrast/Sharpness/B/W mode/Gamma curve		
		SNR	>55dB		
	Effective Pixels	2.07m,16:9			
	Pan-and-Tilt Parameter	Pan/Tilt Movement	-170°~+170°/-30°~+90°		
		Pan/Tilt Control Speed	0.1~100°/S ; 0.1~45°/S		
		Preset Speed/Quantity	Pan:100°/S, Tilt:45°/S; Up to 255 preset positions (10 remote control)		
	Audio Compression Format	AAC,MP3,G.711A			
	Video Compression Format	H.264, H.265,Dual Streaming Output			
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60			
	Control Protocol	VISCA Pelco-D Pelco-P			
	Baud Rate(bps)	115200 9600 4800 2400bps			
	Network Protocol	RTSP RTMP ONVIF GB/T28181 VISCA			
Power	Input Voltage	DC12V			
	Max Power	18W			
Environment	Temperature	-10℃~50℃			
	Humidity	20%~80%			
Physical	Weight	Net	1.5kg		
	Dimension	Net	253.9mm×179mm×144.7mm		

Order Codes

Product Code	Model
981-0011-05-0	RGB12X-SAI-WH with 12X zoom and 3G SDI output
981-0011-06-0	RGB20X-SAI-WH with 20X zoom and 3G SDI output
981-0011-07-0	RGB12X-HAI-WH with 12X zoom and HDMI/USB3.0 output
981-0011-08-0	RGB20X-HAI-WH with 20X zoom and HDMI/USB3.0 output
291-0001-12-0	Camera Bracket Mount

Dimension

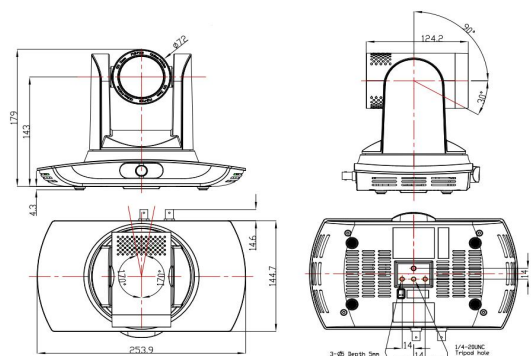

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

